

LP-812W < Main specifications >
for GHS Pictogram

Model	LP-812W
Printing type	Thermal Transfer method, 2-colors
Type of thermal head	Edge head
Printing density	305dpi x 305dpi *305dpi x 610dpi (4inches/sec)
Printing speed	4inches(101.6mm)/sec, 6inches(152.4mm)/sec, 8inches(203.2mm)/sec
Maximum printable width	216.8mm
Maximum printable length	490mm
Printing color	(Standard)-Black/Red, (Others)-Blue/Green/White
The number of thermal heads/Printing method(OS)	2heads/Printing by using the Windows driver (7/8<32/64bit>)
Paper feeder sensor	Transmissive sensor / Reflective sensor
The mechanism of labeler	The labeler can connect directly with the vertically operatable labeler
Outside interface	PC : USB2.0/LAN (onboard) Labeler : Serial
Keyboard	FEED KEY (One sheet feed) / STOP KEY (Pause) / RESTART KEY (Error cancellation)
Ink ribbon saving function	Capable (Under the condition of the no printing areas more than 30mm)
Thermal head disconnection check function	Available from printing condition setting tool
LED display	3 styles (POWER / ONLINE / ERROR)
Operating conditions	Temperature: 5~40°C(*special condtion required under 36~40°C), Humidity: 30~80%RH
Power	AC100V~240VA 50/60Hz
Size	420mm(Width) x 395mm(Depth) x 315mm(Height) *Exclude label holder unit
Weight	26kg *Exclude label holder unit)
Paper type	Label / Tag roll (synthetic paper / general paper capable)
Paper width	100mm ~ 220mm
Paper thickness	0.13mm ~ 0.18mm
Label length	50mm ~ 600mm
Label length detection	Label gap, the back marking, without sensor (size measuring)
Maximum diameter of paper roll	210mm
Winding direction	Revolute (recommended) / involute
Label holder shaft	Centering adjuster
Ink ribbon length	300mm (standard)
Bundled software	Printing condition setting tool
Options	Cutter unit (Rotary type), Label detachment + rewinding unit

*The specification is subject to change without notice for improvements purpose.

E-mail : info@global-ps.biz



Global PS Inc.

- Tokyo Station
Postal code 130-0012
3rd Floor, MT Bldg., 4-10-5, Taihei,
Sumida-ku, Tokyo, JAPAN
TEL +81-3-3621-0204 FAX +81-3-3621-0836
- Head Office & Factory
Postal code 963-8824
164-1, Aza Doba, Koriyama, Fukushima, JAPAN
Inside of Net & Print Inc.
TEL +81-24-983-7851 FAX +81-24-983-7852

Distributors :

*Windows and Windows 7/8 are registered trademarks of Microsoft Corporation.

High-speed 2-colors Thermal -transfer Label Printer

LP-812W

for GHS Pictogram


8 inches

2 colors

Lightest
and
Fastest

Space-saving

Onboard
LAN I/F

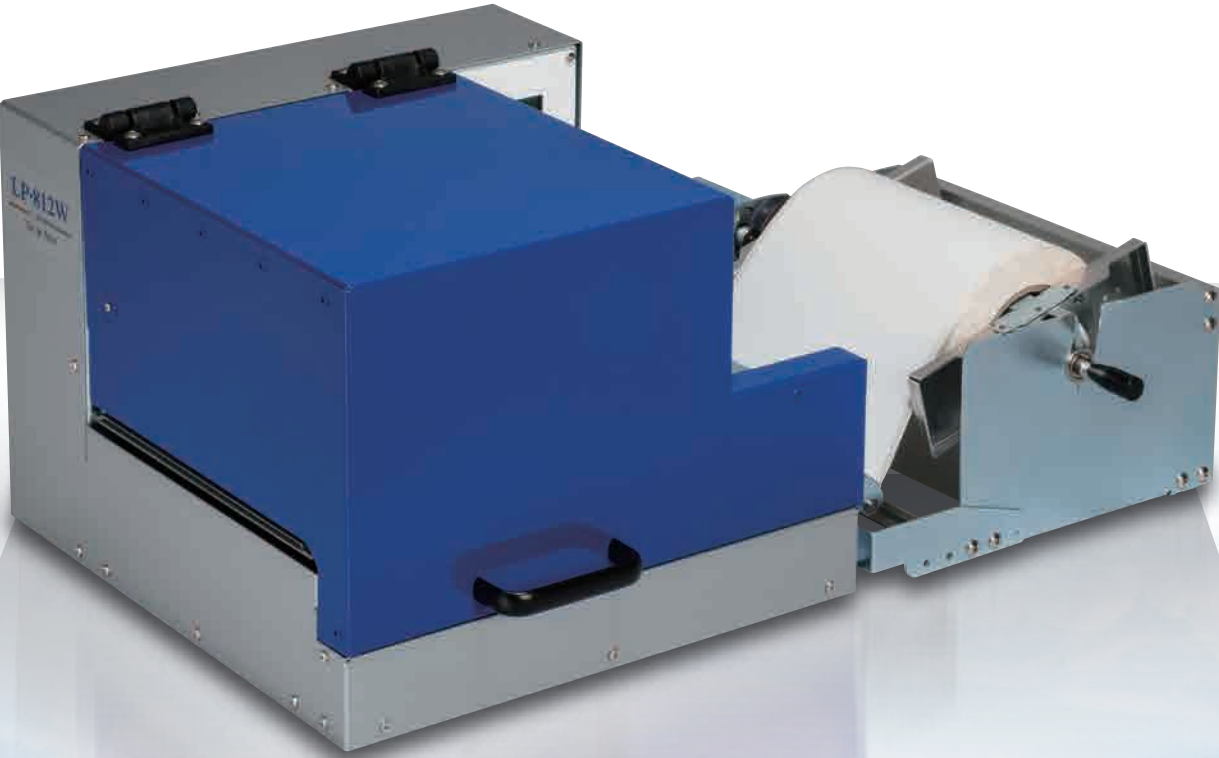

Global PS Inc.